


Fold filter fabric over top of fence fabric a minimum of 6" and fasten to fence.

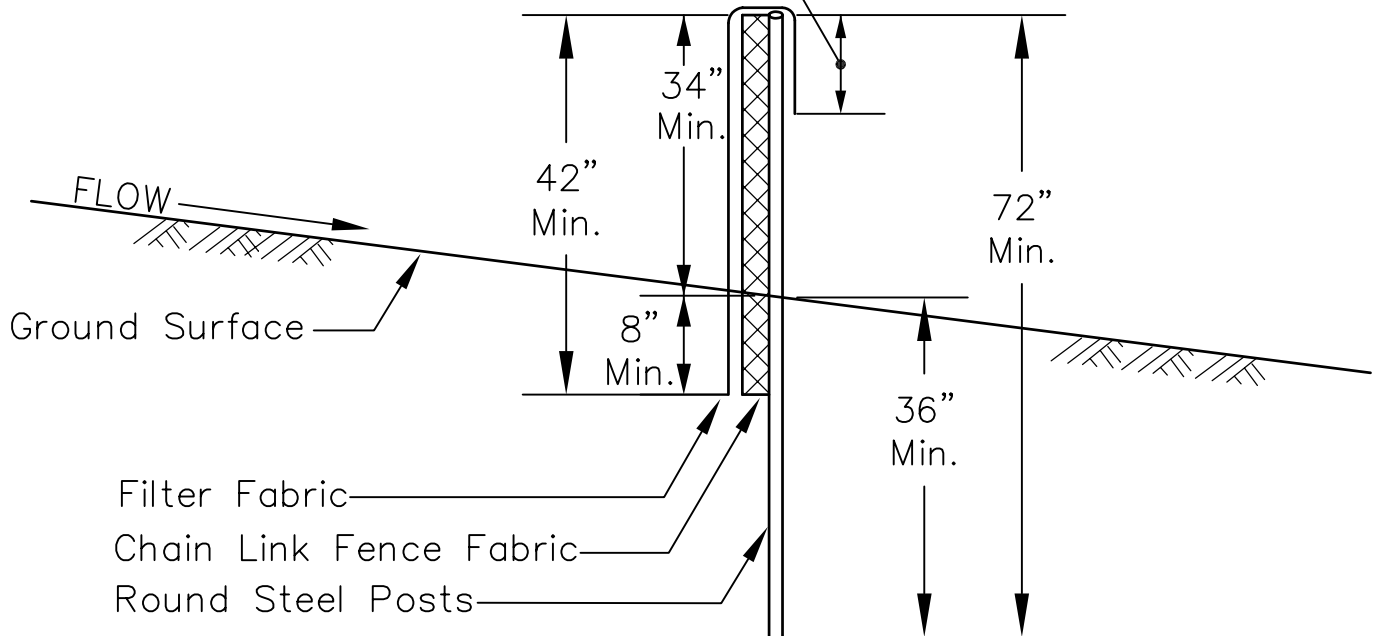

STANDARD SYMBOL

—SSF—SSF—

NOTES

1. Steel Posts must be Schedule 40 or 'SS-40', 2.5" diameter, galvanized pipe. Post Spacing must not exceed 10 linear feet. Posts do not need to be set in concrete.
2. Chain link fence fabric must be 2" x #9 gauge x 42" KK wire. Chainlink fence fabric must be stretched taut and securely fastened to posts with fence wire.
3. Filter fabric must be MSHA Class 'F' fabric. Filter fabric must be stretched taut and securely fastened to chain link fence, front and back. Where two ends of filter cloth meet, they must be overlapped a minimum of 6", folded together and fastened.
4. Maintenance must be performed as needed and silt buildups removed when they reach an 18" depth above existing ground or when "bulges" develop in the silt fence.
5. All other details and specifications shall be in accordance with U.S.D.A.—S.C.S., M.D.E.—W.M.A. and M.S.H.A. specifications.



MONTGOMERY COUNTY
DEPARTMENT OF PERMITTING
SERVICES
WATER RESOURCES

MODIFIED
SUPER SILT FENCE

DATE: 6/03

SCALE: NONE